



US006608492B1

(12) **United States Patent**
Entenmann

(10) **Patent No.:** **US 6,608,492 B1**
(45) **Date of Patent:** **Aug. 19, 2003**

(54) **AC IMPEDANCE BRIDGE**

(76) Inventor: **Richard Carl Entenmann**, 5551 Calumet Ave., La Jolla, CA (US) 92037

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 13 days.

(21) Appl. No.: **09/934,014**

(22) Filed: **Aug. 20, 2001**

(51) **Int. Cl.**⁷ **G01R 27/08**

(52) **U.S. Cl.** **324/706; 374/183; 327/563**

(58) **Field of Search** 324/606, 656, 324/704, 705, 709, 725; 374/183; 327/563

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,895,292 A	*	7/1975	Zair et al.	324/62
5,406,223 A		4/1995	Vulih et al.	330/258
5,757,236 A		5/1998	Ortiz et al.	330/296
6,046,642 A		4/2000	Brayton et al.	330/296
6,100,759 A		8/2000	Sirna et al.	330/252
6,175,279 B1		1/2001	Ciccarelli et al.	330/296
6,255,904 B1		7/2001	Capodivacca et al.	330/51

OTHER PUBLICATIONS

Feng, et al. *ac ohm meter for low-temperature thermometry* *Review Sci. Instrum.*, May, 1999, pp. 2365–2371, v. 70(5), American Institute of Physics, USA.

Brandt, et al. *Low temperature thermometry in high magnetic fields* *Rev. Sci. Instrum.*, Jan., 1999, pp. 104–110, v. 70(1), American Institute of Physics, USA.

Kato, et al. *New apparatus for the precise temperature control in 3He refrigerator* *Rev. Sci. Instrum.* Jan., 1998, pp. 164–167, v. 69(1) Amer. Inst. Physics, USA.

Sutton, *Current source with matched common mode output impedances* *Rev. Sci. Instrum.* January, 1998, pp. 164–167, v. 69(1) Amer. Inst. Physics, USA.

Chaussy, et al. *A very sensitive technique for measuring the temperature derivative of electrical resistance between 4 and 300 K* *Rev. Sci. Instrum.* Aug., 1992, pp. 3953–3958, v. 63(8) Amer. Inst. Physics USA.

Koon, *What do you measure when you measure resistivity?* *Rev. Sci. Instrum.* Jan. 1992, pp. 207–210 v. 63(1) American Institute of Physics, USA.

(List continued on next page.)

Primary Examiner—Christine Oda


Assistant Examiner—Etienne P LeRoux

(74) *Attorney, Agent, or Firm*—Thomas J. Tighe, Esq.

(57) **ABSTRACT**

The output of a preamplifier is communicated to an active feedback circuit which drives the primary of a balancing transformer the secondary of which is connected in series with an impedance under test (IUT), the terminals of the series connection are communicated to respective differential inputs of the preamplifier. The feedback circuit automatically drives the preamplifier input toward balance, balance being achieved when the signal across the secondary equals the signal across the IUT in magnitude but opposite in phase. A DC blocking circuit is interposed between the series connection and the preamplifier for blocking preamplifier bias current from loading and heating the IUT. At balance an active equalizing transfer function circuit nulls any potential across the blocking circuit.

7 Claims, 3 Drawing Sheets

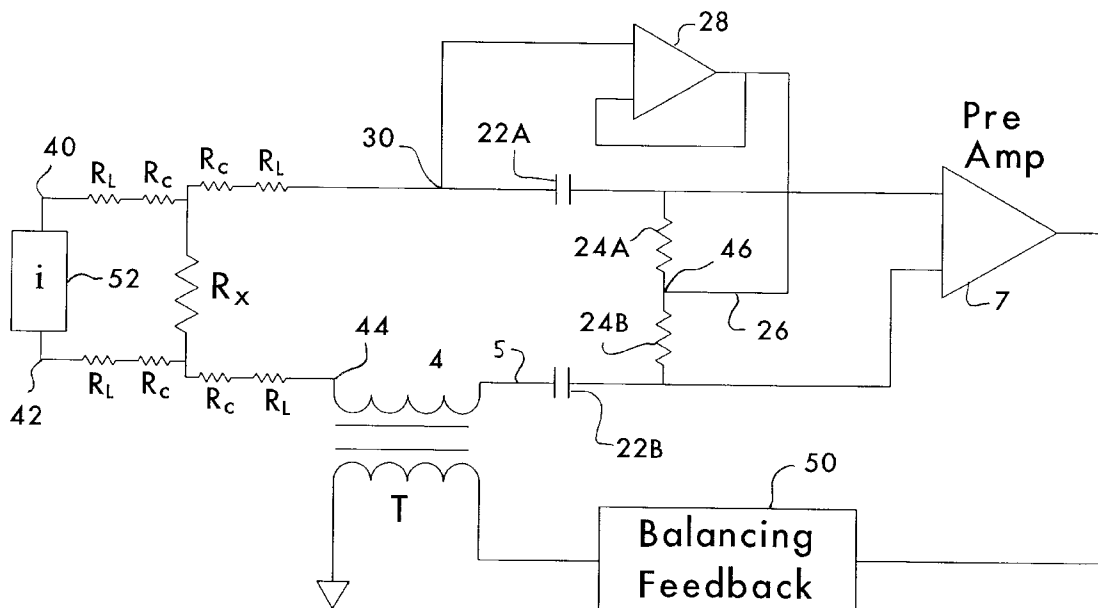

OTHER PUBLICATIONS

Cho, et al. *AC bridge for high-temperature magnetic thermometry* Rev. Sci. Instrum. Aug., 1990 pp. 2232-2235 v. 61(8) American Institute of Physics, USA.

Bruschi, et al. *New high-precision bridge for low-resistance thermometry* Rev. Sci. Instrum, Sep., 1986 pp. 2361-2362, v. 57 (9) Amer. Inst. Physics, USA.

Corson, *Computer-compatible, self-contained, precision ac resistance bridge suitable for thermometry* Rev. Sci. Instrum. Dec., 1985 pp. 2310-2311 v. 56(12) Amer. Inst. Physics, USA.

Narci, *Low-noise four-terminal ac resistance bridge* Rev. Sci. Instrum. May, 1985 pp. 773-774 v. 56(5) American Institute of Physics, USA.


Bruschi, et al. *Precise temperature controller for resistance thermometers* Rev. Sci. Instrum. Mar., 1985 pp. 427-429 v. 56(3) American Institute of Physics, USA.

Gearhart, et al. *Simple high-stability potentiometric ac bridge circuits for high-resolution low-temperature resistance thermometry* Rev. Sci. Instrum., Nov., 1975 pp. 1493-1499 v. 46(11) Amer. Inst. Physics, USA.

Anderson, *Low-Noise ac Bridge for Resistance Thermometry at Low Temperatures* Rev. Sci. Instrum. Oct., 1973 pp. 1475-1477, v. 44(10) Amer. Inst. Physics, USA.

Low Noise Precision Difet Operational Amplifier, Burr-Brown IC Data Book-Linear Products pp. 1.27-2.37 and Figs. 17 & 18, 1994, Burr-Brown Corporation, USA.

* cited by examiner

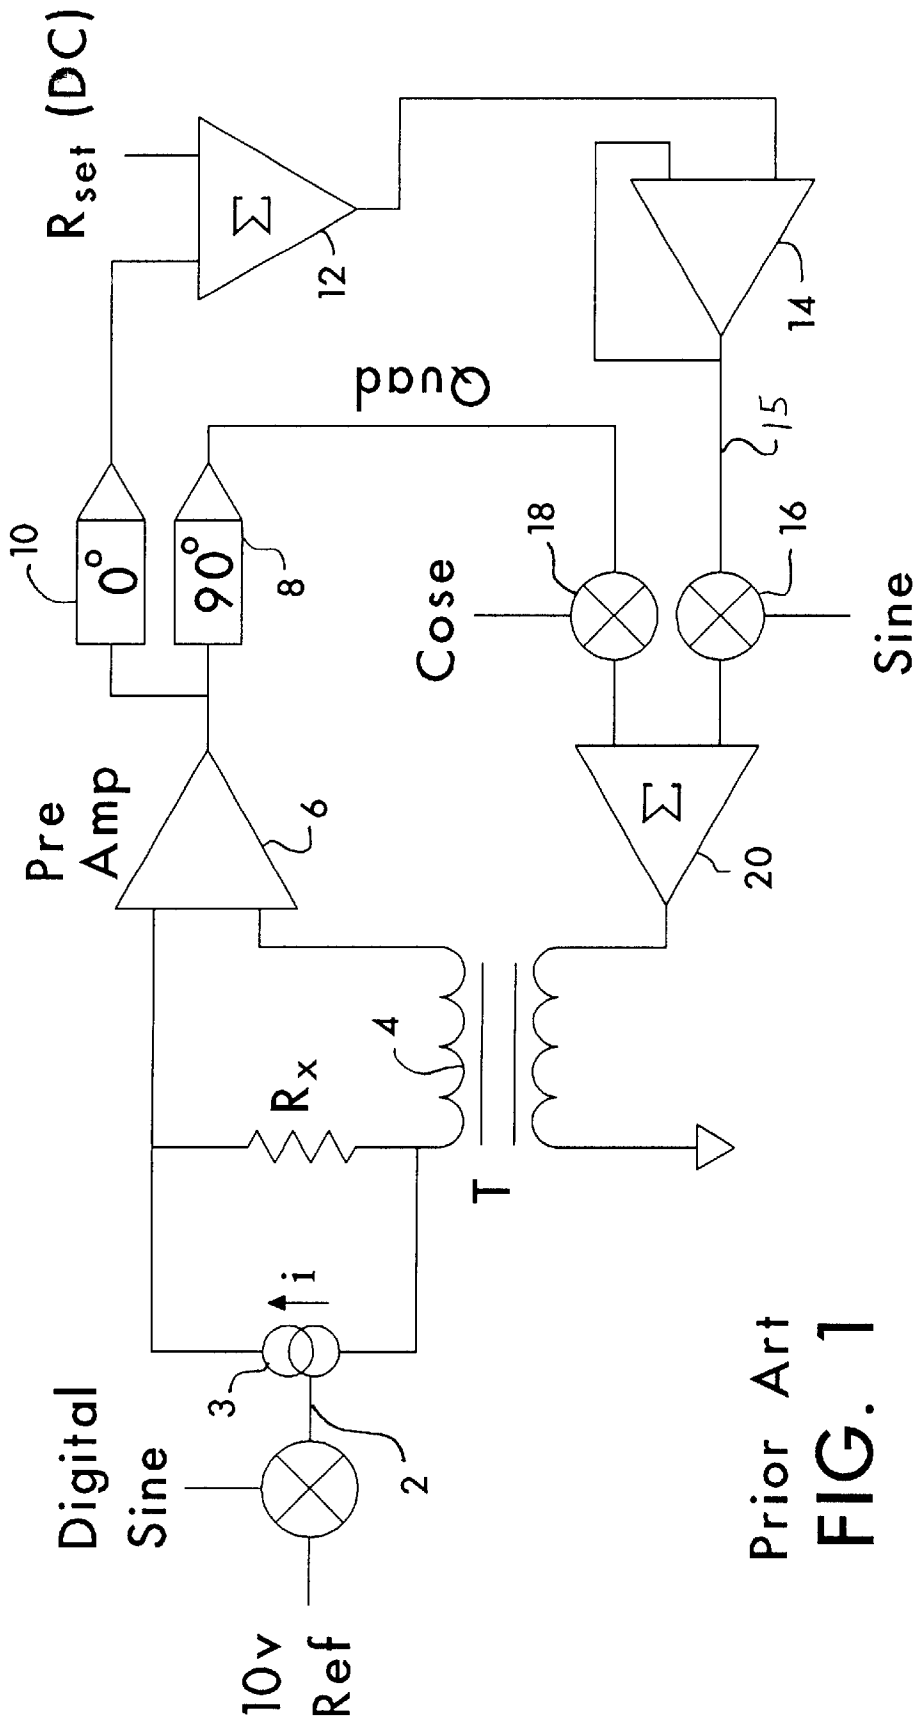

Prior Art
FIG. 1

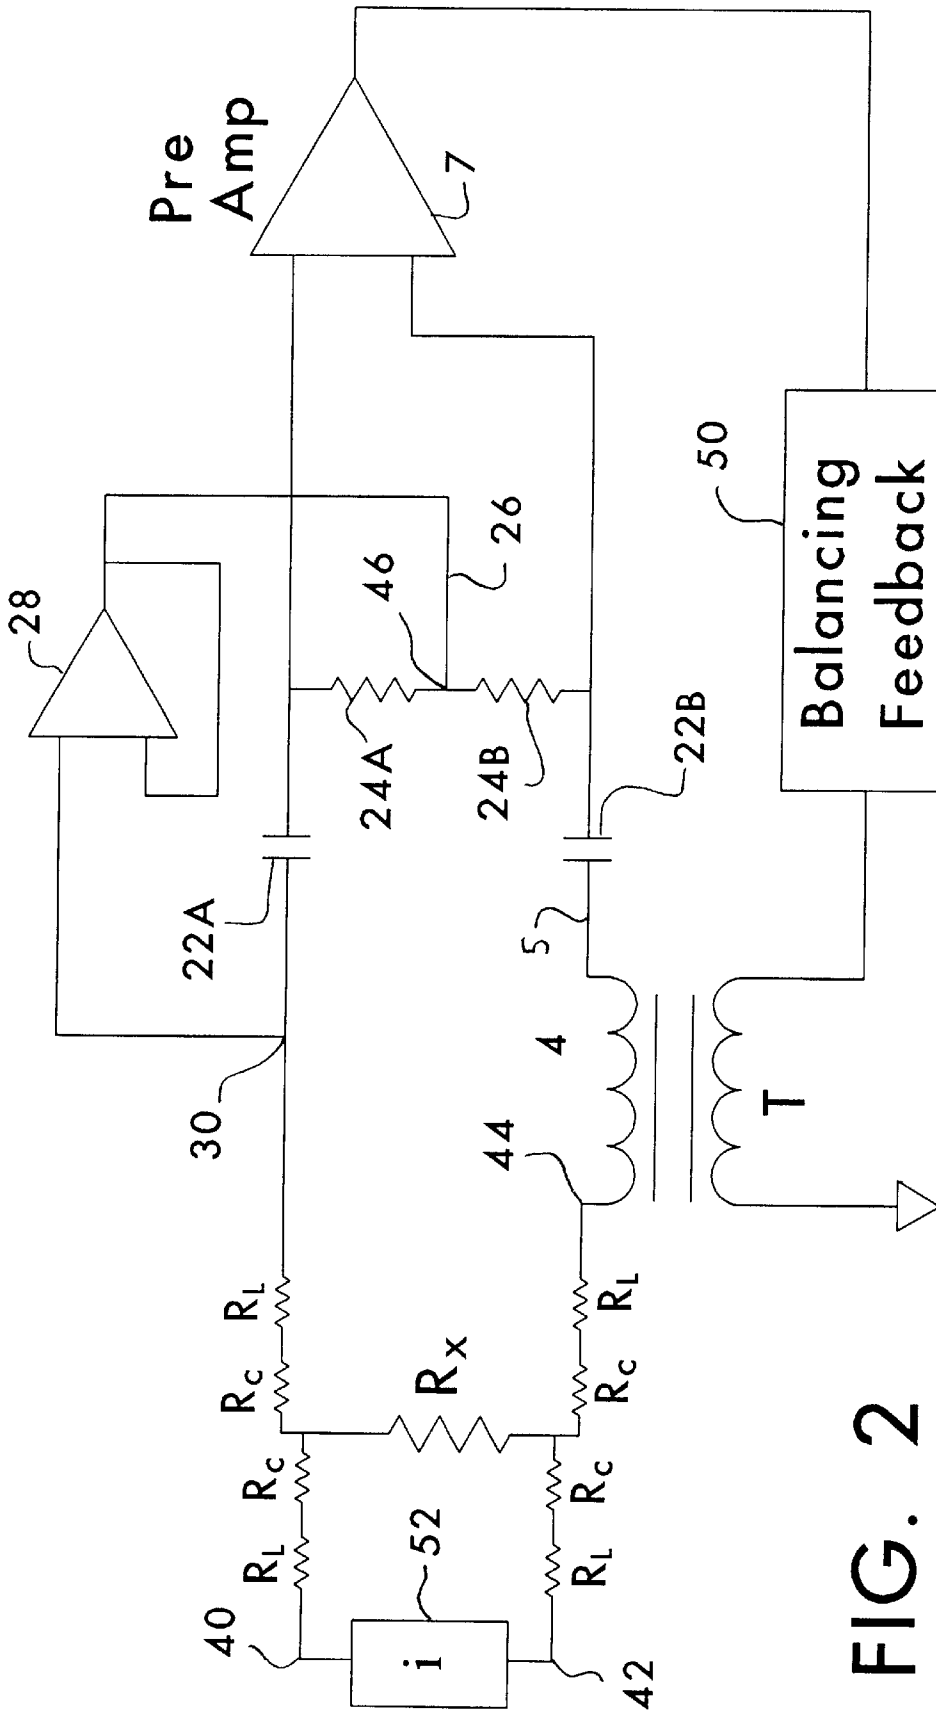


FIG. 2

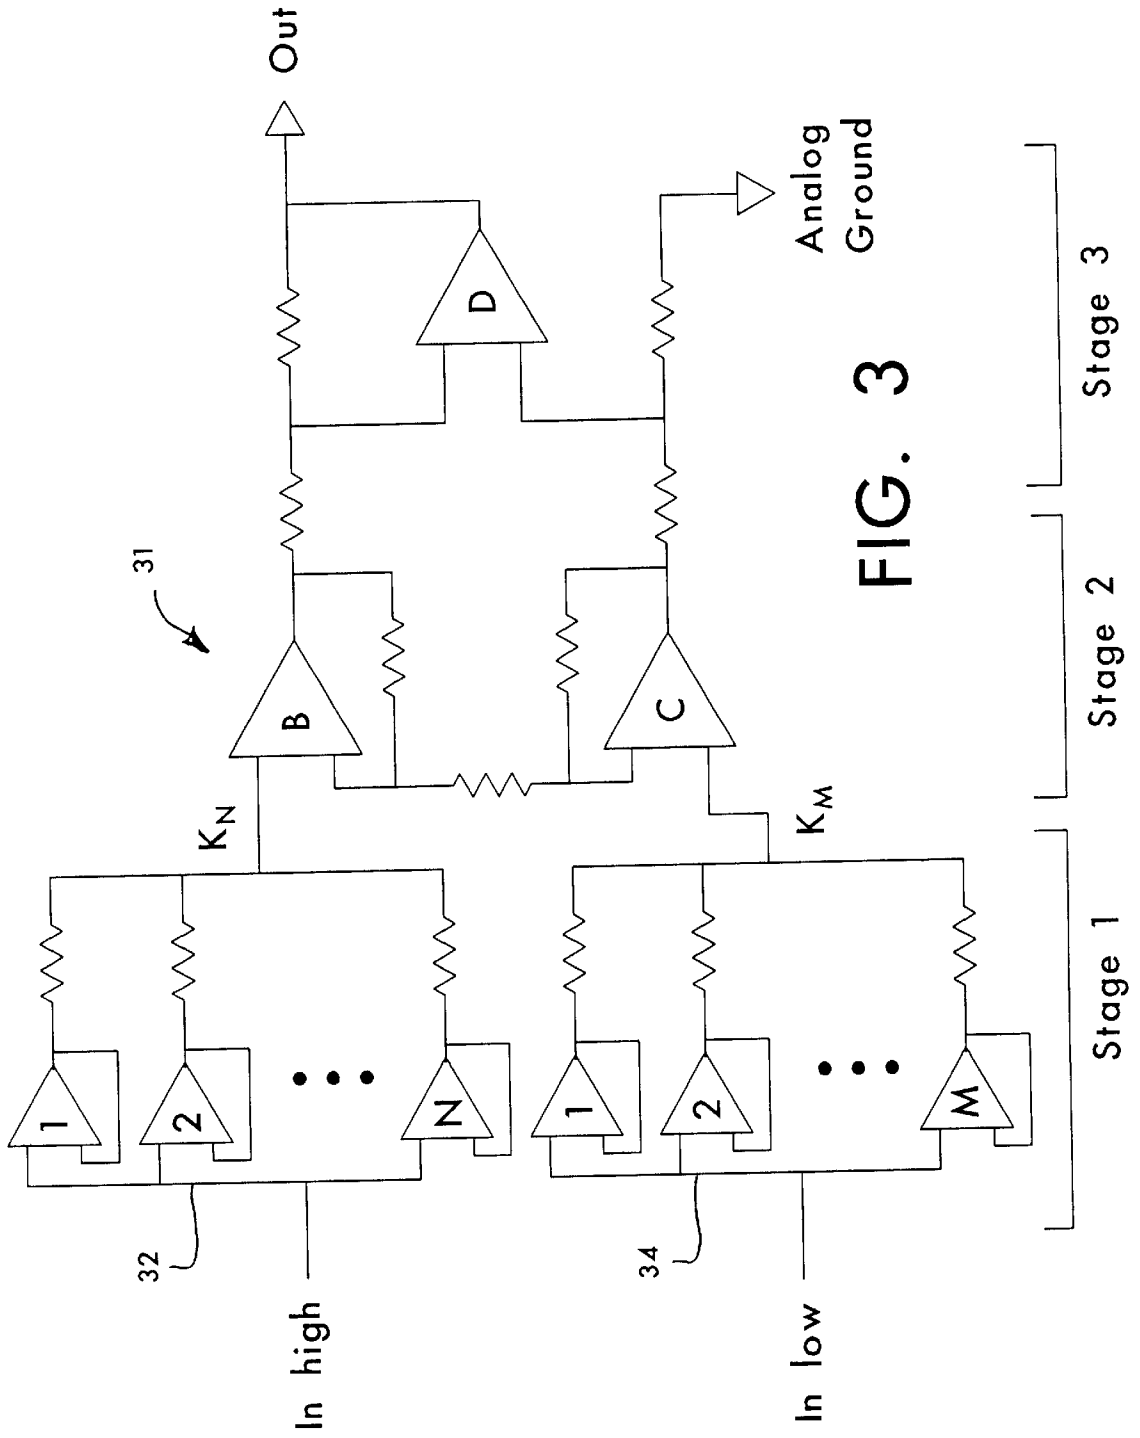


FIG. 3

AC IMPEDANCE BRIDGE

This invention relates in general to self-balancing impedances bridges, and in particular to such bridges adapted for temperature control at extremely low temperatures, e.g. at milliKelvin levels.

BACKGROUND OF INVENTION

FIG. 1 herein illustrates a prior art AC (alternating current) impedance bridge useful for monitoring the temperature of a cryogenic environment by measuring the resistance of a temperature dependent resistor R_X in the environment. At low temperatures, below 1 degree kelvin, the prior art cannot measure high value resistors of above 100 K (kilo) ohms with sufficiently low power while achieving acceptable high resolution. The prior art works effectively at low resistance of below 10 K ohms, but modern resistive temperature sensors have values in the 100 K ohms to a few megohms, and many cryogenic applications and experiments need extremely low excitation powers to excite the resistive sensors in order to avoid self-heating of the sensors. The need for low excitation powers for the higher ohmage sensors has raised the problem of excess DC (direct current) bias currents from the prior arts' preamplifiers 6. Sensors need to be measured with extremely low input voltage noise, on the order of below 10 nanovolts (RMS, root mean square, per square root Hertz at typically 16 Hz) along with low current noise of below 10 femto amps. At low temperatures in the millikelvin range, these sensors produce thermal noise, for example, approximately 1 to 4 nanovolts per square root Hz (Hertz) at 300 millikelvin for a 100 K ohm to 1 M (megohm) ohm resistor. The prior art is lacking in that the DC bias current is sufficiently high to self-heat the higher ohmage sensors. For accurate temperature measurements in the millikelvin range, the DC bias current flowing through a sensor needs to be near 1 pico amp or less. The prior art has bias currents in excess of 1 pico amp.

One solution would be to use a semiconductor operational amplifier with a bias current of the required 1 pico amp or less as the preamplifier 6, but unfortunately such amplifiers have an unacceptably high input noise voltage. This is because there is an inherent characteristic in such amplifiers: the lower the DC bias current, the higher the input voltage noise.

This invention overcomes these problems, and others, by providing a circuit that eliminates excess DC bias current while avoiding any significant increase in noise voltage communicated to a preamplifier.

SUMMARY OF THE INVENTION

An object of this invention is to provide a means and method for eliminating undesirable DC bias current from the input of a preamplifier according to this invention without an undesirable increase in measurement noise.

A further object of this invention is to provide a means and method for eliminating undesirable DC current from the input of a preamplifier according to this invention without undesirable loading the unknown impedance.

These objects, and others expressed or implied in this document, are accomplished by a bridge including an amplifier (commonly called a preamplifier) having gain and including differential inputs; a transformer, a secondary of the transformer being connected in series with the unknown impedance, the terminals of the series connection communicating with respective differential inputs of the amplifier;

a transfer function, communicating with the output of the amplifier and exciting the primary of the transformer, for automatically driving the bridge toward balance, balance being achieved when the signal across the secondary equals the signal across the unknown impedance; and a circuit for blocking any DC bias current (direct current caused by an inherent bias of the inputs of the amplifier) from flowing through the unknown impedance. In a preferred embodiment the blocking circuit includes a pair of direct current blocking capacitors interposed between respective terminals of the series connection and the amplifier inputs, and a current shunt communicating with each capacitor on the capacitor's amplifier side. Also in the preferred embodiment an equalizing transfer function includes a voltage follower whose input communicates with the unknown impedance's terminal of the series connection, and whose output communicates with said each capacitor through said each capacitor's current shunt, the input impedance of the follower being high enough and bias current being low enough to avoid significantly loading and heating the unknown impedance. In alternative embodiments, one end of the unknown impedance communicates with a reference potential, e.g. analog ground, so no DC bias current can be sourced from that end, and DC bias current is blocked from the other end by a blocking circuit which is equalized in signal potential by the equalizing transfer function.

This invention also presents a preamplifier configured from two sets of paralleled operational amplifiers feeding respective amplifiers which in turn feed the differential inputs of a single amplifier to convert the preamplifier output to single-ended. The paralleled input amplifiers substantially reduce voltage noise over conventional amplifiers, while the concurrent increase in DC bias current is not detrimental to a bridge according to this invention due the bias current elimination feature of this invention.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a diagrammatic illustration of a prior art AC resistance bridge.

FIG. 2 is a functional diagram illustrating a preferred embodiment of this invention.

FIG. 3 is a functional diagram illustrating in a further detail an exemplary preamplifier according to this invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to FIG. 1, illustrated is a prior art AC resistance bridge. As illustrated, a 10 volt DC reference is multiplied by sequential samples of a digitized sine function. The product sinusoidal signal 2 is communicated to a high impedance current generator 3 comprised of a circuit of operational amplifiers and precision resistors. The current generator is connected in parallel to the unknown impedance being measured, R_X . The output impedance of the current generator is extremely high with respect to R_X so as to not have any significant effect on the measurements of R_X . The secondary 4 of a balancing transformer T is in series with R_X , and the terminals of this series circuit communicate with respective inputs of a preamplifier 6. The prior art preamplifier is typically characterized by high impedance, low noise of 1 to 30 nano volts, with DC bias current of 10 to 100 pico amps. The preamplifier amplifies any differential between its inputs sufficiently for further processing. The secondary 4 of the balancing transformer is driven by a feedback circuit. In the feedback circuit, the quadrature and in-phase components of the signal output of the preamplifier are detected

and separately integrated, **8** and **10** respectively. The integrated in-phase component is summed **12** with a DC voltage, R_{SET} , and buffered by a voltage follower **14** whose output **15** is the measurement output. R_{SET} is proportional to a resistance set point or offset that a user sets to select the temperature about which the temperature is to be controlled or servoed. The integrated quadrature component and the output of the buffer **14** are separately multiplied by cosine and sine functions, **18** and **16** respectively, and the product signals are communicated to a summing circuit **20** the output of which drives the primary of the balancing transformer T. The gain of the preamplifier, the parameters of the feedback circuit, and the turns ratio of the transformer T are such that both phases are automatically balanced which occurs when $iR_X = V$ where V is the voltage across the secondary of T.

Referring to FIG. 2, a novel bridge according to this invention is illustrated as including a preamplifier **7** with a novel DC bias current elimination circuit at its input. An AC current generator **52** excites an unknown impedance R_X . For temperature sensing applications, the unknown impedance is a temperature sensor which is typically a four wire device containing a temperature dependent resistance (R_X) with unavoidable contact resistances, R_C , to allow the internal connections. The four terminals allow independent connections for the current and voltage leads. The R_C resistances are usually small compared to R_X but may be as large as 30% of R_X . The four R_C resistances are not equal and usually are unknown. For measuring temperature in a cryogenic environment, the sensor is typically remote from the impedance bridge and is connected by four long lead wires, e.g. ten feet, each of which has a resistance, R_L . The four R_L values are typically not equal and may range from 1 ohm to 1 K ohm depending on the type of wire used. In series with unknown impedance R_X is the secondary **4** of a balancing transformer T. A feedback transfer function **50** excites the primary of the transformer and automatically drives the bridge toward balance, balance being achieved when the signal across the secondary equals the signal across R_X in magnitude but opposite in phase. DC blocking capacitors, **22A** and **22B**, are interposed between opposite ends of the series circuit (R_X in series with secondary **4** of T) and their respective preamplifier **7** inputs in order to block the flow of any DC bias current through R_X . In order to provide discharge paths for the capacitors, shunt resistors **24A** and **24B** provide a current path from the preamplifier sides of the capacitors, **22A** and **22B** respectively, to a virtual common mode potential **26** at the output of an operational amplifier **28** configured as a voltage follower, unity gain, the input of which is connected to a point **30** at which the common mode potential is felt. The capacitors completely block all DC currents from the preamplifier that would otherwise flow through R_X thus self heating it. Operational amplifier **28** does allow some bias current to flow but is preferably chosen to have 1 pico amp or less of bias current to minimize the self-heating of R_X . Operational amplifier **28** can have a noise voltage of 100 nano volts or larger without affecting the measurement. The output of **28** is used to discharge the capacitors, **22A** and **22B**, thus preventing voltage buildup on the preamplifier side of the capacitors. The shunt resistors, **24A** and **24B**, preferably have a resistance four orders of magnitude larger than R_X . This minimizes the noise across R_X by reducing the thermal noise current generated by **24A** and **24B**. The resistor R_X is not loaded by the DC elimination circuitry because the transformer servoes signal point **5** to exactly equal **30** and this voltage drives the common point between **24A** and **24B**. Without the transformer, the DC elimination circuitry would shunt R_X thus preventing a true

reading of R_X . Operational amplifier **28** by forcing the junction of **24A** and **24B** to equal **30** and **5** allows connection of a ground connection on either terminal of the current generator without loading R_X . Operational amplifier **28** further allows line resistance or contact resistances to be present between R_X and either terminal of the current generator, transformer **4**, and point **30** without allowing **22A/22B** and **24A/24B** to shunt R_X .

In practice the sensor R_X must have a return path to ground to prevent its voltage potential from floating and to return the small DC bias current of operational amplifier **28**. The embodiment shown in FIG. 2 is preferred because it allows the current generator to be returned to ground at one of many points and this is why the ground connection is not shown. The preferred embodiment blocks all bias currents from the preamplifier. Typically the ground return is connected to **40** or alternatively **42**. By dedicating a ground point at **40** or **42**, the circuit can be simplified by elimination of one capacitor and one resistor. For example, in a second embodiment, there is a ground point at **42**, and capacitor **22B** has been replaced with a short and resistor **24B** has been eliminated. In this embodiment a bias current from the preamplifier can flow through transformer **4** and the line and contact resistances, R_L and R_C to the ground point. This can cause heating in the line and contact resistances but no heating in R_X . Similarly, a third embodiment includes grounding point **40**, replacing capacitor **22A** by a short, and eliminating shunt resistor **24A**.

Referring to FIG. 3, illustrated in three stages is an exemplary preamplifier, generally designated **31**, suitable for this invention. Stage **1** includes two sets of paralleled operational amplifiers, **32** and **34**, all configured as voltage followers, and labeled **1** through N and **1** through M, respectively. The outputs of the sets are summed, K_N and K_M , to a pair of operational amplifiers B and C, respectively, in stage **2**. The stage **2** amplifiers are preferably of very low noise and they provide the desired gain of the preamplifier. The amplified signals from B and C feed into stage **3**. Stage **3** includes a differential amplifier D that resolves the differential signals from B and C into a single ended signal out (Out) that is referenced to analog ground. Stage **1** takes advantage of the fact that when voltage noises are summed, the resultant noise is reduced by a factor of square root of N and that the current noise is increased by a factor of square root of N. As an example, a commonly available operational amplifier is specified to have 16 nanovolts of voltage noise and 0.6 femto amps of current noise with a bias current of 1 pico amp. Thus by making $N=M=25$ the example preamplifier will have about 3 nanovolts of voltage noise, 3 femto amps of current noise, and 25 pico amps of DC bias current per input. This would allow measurement of a 1 megohm resistor with approximately 10 nanovolts or less of resolution at low temperatures.

A further benefit of the invention is: The invention allows the impedance R_X to be excited by a parallel DC current generator without locking up the preamplifier. This might be used to purposely heat the sensor with a DC current while measuring the value of the impedance R_X with the AC current, or other uses.

The foregoing description and drawings were given for illustrative purposes only, it being understood that the invention is not limited to the embodiments disclosed, but is intended to embrace any and all alternatives, equivalents, modifications and rearrangements of elements falling within the scope of the invention as defined by the following claims. For example, the amplifier **28** in FIG. 2 can be embodied by any voltage follower circuit, not necessarily an